Instruction Manual

Front Bike Light 1000lm




IIBEPFLM1000



USB SMART SENSOR HEADLIGHTS

This product adopts new PC+ALU eco-friendly materials. The quick-release design is easy to install and disassemble.

PRODUCT STRUCTURE DIAGRAM

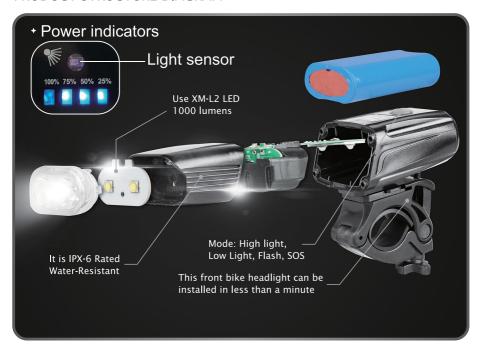

TECHNICAL PARAMETERS

	XM-L2			
	Max 1000 Lumens			
High Light	Middle Light	Low Light	Flash/SOS	Light Sensor Mode
3h	6h	12h	8h	/
	5200MAH Lithium Battery			
	8h			
ce	IPX-6			
	195g			
	105x48x48mm			
	3h	3h 6h 52	Max 1000 L High Light Middle Light Low Light 3h 6h 12h 5200MAH Lithi 8h ce IPX-6	Max 1000 Lumens High Light Middle Light Low Light Flash/SOS 3h 6h 12h 8h 5200MAH Lithium Battery 8h ce IPX-6 195g

→ HOW TO USE

- 1, Click the power button to switch on/off and change lights mode.
- 2, Press the button for 2 seconds to enter into the light sensor mode. In light sensor mode, the headlight will be lighting automatically according to surrounding's brightness. Click the power button again to quit light sensor mode.